DICOM CONFORMANCE STATEMENT

SIMPLEWARE MEDICAL

SYNOPSYS (NORTHERN EUROPE) LTD

BRADNINCH HALL, CASTLE STREET

EXETER, DEVON, EX4 3PL, UK

VERSION 2.0

EFFECTIVE FROM: MAY 7, 2024

1 Conformance Statement Overview

Simpleware provides an image processing software environment for converting 3D scan data (MRI, CT, micro-CT, FIB-SEM...) into computational models. The application supports searching for and loading DICOM images from a local file system or remote file server. Anonymisation

1.3 Supported Image SOP Classes

Name	UID
CT Image Storage	1.2.840.10008.5.1.4.1.1.2
Enhanced CT Image Storage	1.2.840.10008.5.1.4.1.1.2.1
MR Image Storage	1.2.840.10008.5.1.4.1.1.4
Enhanced MR Image Storage	1.2.840.10008.5.1.4.1.1.4.1
Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7
NM Image Storage	1.2.840.10008.5.1.4.1.1.20
Encapsulated STL Storage	1.2.840.10008.5.1.4.1.1.104.3
Encapsulated OBJ Storage	1.2.840.10008.5.1.4.1.1.104.4

2 Table of Contents

1 Conformance Statement Overview 2

1.1 Network Services 2

1.2 Media Services 2

1.3

5.1 Implementation Model 22
5.1.1 Application Data Flow Diagram 22
5.1.2 Functional Definitions of AEs 22
5.1.3 Sequencing of Real-World Activities 22
5.2 AE Specifications 22
5.2.1 Simpleware Specification 22
5.3 Augmented and Private Profiles Specification 22

3 Introduction

3.1 Audience

This document is written for people who need to understand what types of DICOM files and services Simpleware is compatible with. This includes both those responsible for overall imaging network policy and architecture, as well as integrators who must have a detailed understanding of the DICOM features of Simpleware. This document contains some basic DICOM definitions so that any reader may understand how this product implements DICOM features. However, integrators are expected to fully understand all the DICOM terminology, how the tables in this document relate to the product's functionality, and how that functionality integrates with other devices that support compatible DICOM features.

Two Application Entities may also communicate with each other by exchanging media (such as a CD-R). Since there is no Association Negotiation possible, they both use a
that specifies "pre-negotiated" exchange media format, Abstract Syntax, and Transfer Syntax.

4.2 AE Specifications

4.2.1 FIND-SCU

4.2.1.1 SOP Classes

This Application Entity provides Standard Conformance to the following SOP Class:

SOP Class Name	SOP Class UID	SCU	SCP
Study Root Query/Retrieve Information Model-FIND	1.2.840.10008.5.1.4.1.2.2.1	Yes	No

4.2.1.2 Association Policies

4.2.1.2.1 General

FIND-SCU initiates but never accepts associations.

4.2.1.2.2 Number of Associations

Number of Associations as an Association Initiator for FIND-SCU:

Maximum number of simultaneous associations	1

4.2.1.2.3 Asynchronous Nature

FIND-SCU will only allow a single outstanding operation on an Association. Therefore, FIND-SCU will not perform asynchronous operations window negotiation.

4.2.1.2.4 Implementation Identifying Information

Implementation Class UID	1.2.276.0.7230010.3.0.3.6.6
Implementation Version Name	OFFIS_DCMTK_366

4.2.1.3 Association Initiation Policy

FIND-SCU attempts to initiate a new association when the user performs the query action from the user interface. If this involves recursive queries for lower query levels in the hierarchy, these will be performed on the same association.

4.2.1.3.1 Activity - Query Remote AE

4.2.1.3.1.1 Description and Sequencing of Activities

A single attempt will be made to query the remote AE. If the query fails, for whatever reason, no retry will be performed.

4.2.1.3.1.2 Proposed Presentation Contexts

Presentation Context Table					
Abstract Syntax		Transfer Syntax		Role	Extended Negotiation
Name	UID	Name List	UID List		
Study Root Query/Retrieve Information Model - FIND	1.2.840.10008.5.1.4.1.2.2.	Implicit VR Little Endian	1.2.840.10008.1.2	SCU	None
		Explicit VR Little Endian	1.2.840.10008.1.2.1		
		Explicit VR Big Endian	1.2.840.10008.1.2.2		

4.2.3.3.1.2 Proposed Presentation Contexts

Presentation Context Table					
Abstract Syntax		Transfer Syntax		Role	Extended Negotiation
Name	UID	Name List	UID List		
See Table 4.2.3-1	See Table 4.2.3-1	Implicit VR Little Endian	1.2.840.10008.1.2	SCU	None
		Explicit VR Little Endian	1.2.840.10008.1.2.1		
		Explicit VR Big Endian	1.2.840.10008.1.2.2		

4.2.3.3.1.3 SOP Specific Conformance

GET – SCU provides standard conformance to the supported GET SOP Classes.

Only a single information model, Study Root, is supported.

A retrieval will be performed at the STUDY level.

4.2.3.4 Association Acceptance Policy

GET – SCU does not accept associations.

4.2.4 MOVE – SCU

4.2.4.1 SOP Classes

MOVE – SCU provide Standard Conformance to the following SOP Class:

Name	UID	SCU	SCP
Study Root Query/Retrieve Information Model – MOVE	1.2.840.10008.5.1.4.1.2.2.	Yes	No

4.2.4.2 Association Policies

4.2.4.2.1 General

MOVE – SCU initiates but never accepts associations.

4.2.4.2.2 Number of Associations

Maximum number of simultaneous associations	1

4.2.4.2.3 Asynchronous Nature

MOVE – SCU will only allow a single outstanding operation on an Association. Therefore, MOVE – SCU will not perform asynchronous operations window negotiation.

4.2.4.2.4 Implementation Identifying Information

Implementation Class UID	1.2.276.0.7230010.3.0.3.6.6
Implementation Version Name	OFFIS_DCMTK_366

4.2.4.3 Association Initiation Policy

MOVE-SCU attempts to initiate a new association when the user requests the study delivery from the user interface.

4.2.4.3.1 Activity – Request File Delivery from AE

4.2.4.3.1.1 Description and Sequencing of Activities

For the study selected from the user interface to be delivered, a single attempt will be made to request it from the remote AE in question. If the request fails, for whatever reason, no retry will be performed.

4.2.4.3.1.2 Proposed Presentation Contexts

Presentation Context Table					
Abstract Syntax		Transfer Syntax		Role	Extended Negotiation
Name	UID	Name List	UID List		
Study Root Query/Retrieve Information Model - MOVE	1.2.840.10008.5.1.4.1.2.2.	Implicit VR Little Endian	1.2.840.10008.1.2	SCU	None
		Explicit VR Little Endian	1.2.840.10008.1.2.1		
		Explicit VR Big Endian	1.2.840.1008.1.2.2		

4.2.4.3.1.3 SOP Specific Conformance

MOVE-SCU provides standard conformance to the supported MOVE SOP Classes.

Only a single information model, Study Root, is supported.

A delivery request will be performed at the STUDY level.

4.2.4.4 Association Acceptance Policy

MOVE-SCU does not accept associations.

4.2.5 STORE-SCP

4.2.5.1 Classes

STORE-SCP provide Standard Conformance to the following SOP Classes:

Name	UID	SCU	SCP
CT Image Storage	1.2.840.10008.5.1.4.1.1.2	No	Yes
Enhanced CT Image Storage	1.2.840.10008.5.1.4.1.1.2.1	No	Yes
MR Image Storage	1.2.840.10008.5.1.4.1.1.4	No	Yes
Enhanced MR Image Storage	1.2.840.10008.5.1.4.1.1.4.1	No	Yes
Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7	No	Yes
NM Image Storage	1.2.840.10008.5.1.4.1.1.20	No	Yes
Encapsulated STL Storage	1.2.840.10008.5.1.4.1.1.104	No	Yes
Encapsulated OBJ Storage	1.2.840.10008.5.1.4.1.1.104	No	Yes

4.2.5.2 Association Policies

4.2.5.2.1 General

STORE-SCP accepts but never initiates associations.

4.2.5.2.2 Number of Associations

Maximum number of simultaneous associations

4.2.5.3.1.2 Proposed Presentation Contexts

Presentation Context Table					
Abstract Syntax		Transfer Syntax		Role	Extended Negotiation
Name	UID	Name List	UID List		
See Table 4.2.5-1	See Table 4.2.5-1	Implicit VR Little Endian	1.2.840.10008.1.2	SCP	None
		Explicit VR Little Endian	1.2.840.10008.1.2.1		
		Explicit VR Big Endian	1.2.840.10008.1.2.1		

4.2.5.3.1.3 SOP Specific Conformance

STORE-SCP provides standard conformance to the Storage Service Class.

4.2.6 MOVE – SCP

4.2.6.1 Classes

MOVE-SCP provide Standard conformance to the following SOP Classes:

Name	UID	SCU	SCP
CT Image Storage	1.2.840.10008.5.1.4.1.1.2	No	Yes
Enhanced CT Image Storage	1.2.840.10008.5.1.4.1.1.2.1	No	Yes
MR Image Storage	1.2.840.10008.5.1.4.1.1.4	No	Yes
Enhanced MR Image Storage	1.2.840.10008.5.1.4.1.1.4.1	No	Yes
Secondary Capture Image Storage	1.2.840.10008.5.1.4.1.1.7	No	Yes
NM Image Storage	1.2.840.10008.5.1.4.1.1.20	No	Yes
Encapsulated STL Storage	1.2.840.10008.5.1.4.1.1.104	No	Yes
Encapsulated OBJ Storage	1.2.840.10008.5.1.4.1.1.104	No	Yes

4.2.6.2 Association Policies

4.2.6.2.1 General

MOVE-SCP initiates but never accepts associations.

4.2.6.2.2 Number of Associations

Maximum number of simultaneous associations	1

4.2.6.2.3 Asynchronous Nature

MOVE-SCP will only allow a single outstanding operation on an Association. Therefore, MOVE SCP will not perform asynchronous operations window negotiation.

4.2.6.2.4 Implementation Identifying Information

Implementation Class UID	1.2.276.0.7230010.3.0.3.6.6
Implementation Version Name	OFFIS_DCMTK_366

4.2.6.3 Association Initiation Policy

4.2.6.3.1 Activity – SendF

4.4.1 AE Title/Presentation Address Mapping

The AE Title of the local application is configurable in the Simple viewer preferences dialog and is shared by all the AEs listed in section 4.1 Implementation Model. The mapping of the logical name by which remote AEs are described in the user interface to presentation address (hostname or IP address and port number) is configurable in the preferences dialog.

4.4.2 4.4.2 Parameters

Parameter	Configurable (Yes/No)	Default Value
General Parameters		
PDU Size	No	16kB
Time-out waiting for acceptance or rejection Response an Association Open Request. (Application Level timeo	No	30 seconds

5 Media Interchange

5.1 Implementation Model

5.1.1 Application Data Flow Diagram

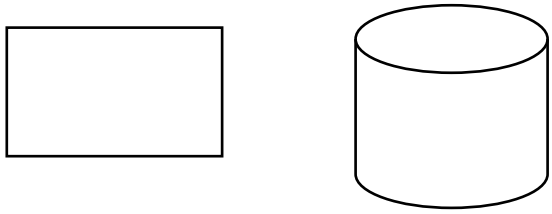

5.1.2 Functional Definitions of AEs

Simpleware provides media support as a File Set Reader. The user may select a series of single-frame image files from a directory, or a multi-frame image file, to be loaded for display and further processing. The reading and display of the contents of DICOMDIR files is supported to help identify series for loading.

5.1.3 Sequencing of Real-World Activities

All FSR activities are sequentially initiated in the user interface or through commands in a script. Another activity may not be initiated until the prior activity has completed.

5.2 AE Specifications

5.2.1 Simpleware+ Specification

Application Profiles, Activities, and Roles for Simpleware		
Application Profiles Supported	Real World Activity	Role
STD-GEN-CD	Load directory or file Export DICOM series	FSR FSU
STD-GEN-DVD-RAM	Load directory or file Export DICOM series	FSR FSU
STD-CTMR-CD	Load directory or file Export DICOM series	FSR FSU
STD-CTMR-DVD	Load directory or file Export DICOM series	FSR FSU

5.2.1.1 File Meta Information for Simpleware

Simpleware will add the meta information to files on export as an FSU.

5.2.1.2 Real World Activities

5.2.1.2.1 Load Directory or File

When the user selects the DICOM import operation, a wizard will be displayed allowing an operating system directory or a DICOMDIR file to be selected. Once selected, a browser will be displayed from which a DICOM series may be chosen and in turn imported into the software. The user can examine relevant DICOM elements prior to import.

5.2.1.2.2 Export DICOM Series

When the user selects the DICOM export operation, a dialog will be displayed, from which options can be selected to export a range of slices, compress the files and anonymise the DICOM elements. The user can then select a destination to export a sequence of DICOM files.

When file compression is specified the format will be lossless JPEG2000.

When exporting a Simplewash background that has no existing DICOM data, the following set of tags will be generated and added to each ‘dcm’ file to be exported:

Attribute name	Tag	Comments
Tag group 08		
SOP Class UID	(0008,0016)	A value is generated.
SOP Instance UID	(0008,0018)	A value is generated.
Study Date	(0008,0020)	The date when exported.
Study Time	(0008,0030)	Set as an empty string.
Accession Number	(0008,0050)	Set as an empty string.
Modality	(0008,0060)	Set to CT – Computed Tomography.
Conversion Type	(0008,0064)	Set to WSD – Workstation.
Referring Physician’s Name	(0008,0090)	Set as an empty string.
Tag group 10		
Patient’s Name	(0010,0010)	Set as an empty string.
Patient’s ID	(0010,0020)	Set as an empty string.
Patient’s Birth Date	(0010,0030)	Set as an empty string.
Patient’s Sex	(0010,0040)	Set as an empty string.
Tag group 18		
Spacing Between Slices	(0018,0088)	Populated according to the image spacing.
NominalScanned Pixel Spacing	(0018,2010)	Populated according to the image spacing.
Tag group 20		

5.3 Augmented and Private Profiles

5.3.1 Augmented Profiles

None.

5.3.2 Private Profiles

None.

5.4 Media Configuration

None.

6 Support of Character Sets

6.1 Overview

Support extends to correctly decoding and displaying the correct symbols in the supported character sets for all strings read from DICOM files.

No specific support for sorting of strings other than in the default character set is provided in the browsers.

6.2 Character Sets

Simpleware supports the following character sets:

Character Set Description	Defined Term
Default repertoire	n/a
Latin alphabet No. 1	ISO_IR 100
Latin alphabet No. 2	ISO_IR 101
Latin alphabet No. 3	ISO_IR 109
Latin alphabet No. 4	ISO_IR 110
Cyrillic	ISO_IR 144
Arabic	ISO_IR 127
Greek	ISO_IR 126
Hebrew	ISO_IR 138
Latin alphabet No. 5	ISO_IR 148
Japanese	ISO_IR 13
Thai	ISO_IR 166
Japanese (JIS X 0208: Kanji)	.6\(K)-2022-IR6 (K)-5.7 .7 (j)-4.:u(JI)-2 p3.56 23 (

7 Security

7.1 Security Profiles

7.1.1 DICOM BCP195 TLS Secure Transport Connection Profile

Secure communication is a mode of operation of Simpleware supported by the implementation of the DICOM BCP195 TLS Secure Transport Connection Profile. This functionality is used by network nodes that can authenticate each other before they can exchange DICOM information.

For secure communication, the TLS protocol v1.2 is used which provides message authentication, integrity, confidentiality and replay protection.

Simpleware uses the following cipher suites:

- TLS_DHE_RSA_WITH_AES_128_GCM_SHA256 (0x00, 0x9E)
- TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 (0xC0, 0x2F)
- TLS_DHE_RSA_WITH_AES_256_GCM_SHA384 (0x00, 0x9F)
- TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 (0xC0, 0x30)
- TLS_RSA_WITH_AES_128_CBC_SHA (0x00, 0x3C)
- TLS_RSA_WITH_3DES_EDE_CBC_SHA (0x00, 0x0A)

The BCP195 TLS Secure Transport Connection Profile is backward compatible with older security profiles. When Simpleware tries to establish a secure connection with a network node using an older security profile, the connection will fall back to using TLS protocol v1.1 or 1.0, in which case these cipher suites are used:

- TLS_RSA_WITH_AES_128_CBC_SHA (0x00, 0x3C)
- TLS_RSA_WITH_3DES_EDE_CBC_SHA (0x00, 0x0A)

Simpleware supports X.509 certificates. Trusted certificates can only be read from the local machine trusted certificate stores. It is the responsibility of the user to setup and maintain certificate stores and trust chains. This includes the removal of revoked certificates and certificate updates prior to their expiration dates. In case of a security breach, the whole certificate chain will need to be replaced.

7.1.2.1.2 InsertedDummyValues

The following values are used as dummy values when an attribute needs to be replaced:

Value Representation (VR)	Dummy Value
DA	10000101
DT	10000101000000.000000
TM	000000.000000
LO	Anonymised

8 Annexes

8.1 IOD Contents

8.1.1

8.3 Coded Terminology and Templates

Not applicable.

8.4 Grayscale Image Consistency

Not applicable.

8.5 Standard Extended/Specialized/Private SOP Classes

None.

8.6 Private Transfer Syntaxes

None.